


UBDSLFL

Levelling base






UBDSLFL product solutions are levelling bases that are used in floor sockets or false floor openings in conjunction with a levelling unit, but also with our screed-flush duct systems. These mounting components are suitable for high traffic loads and consist of a base plate and a levelling screw. The components are made of sendzimir hot-dip galvanised sheet steel in accordance with DIN EN 10346 and are available in lengths from 60 to 220 mm.



Products	weight
UBDSLFL 60	0,054 kg
UBDSLFL 80	0,057 kg
UBDSLFL 150	0,076 kg
UBDSLFL 220	0,102 kg

DETAIL AND APPLICATION IMAGES

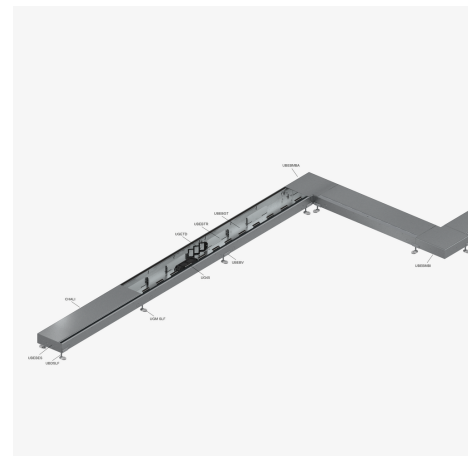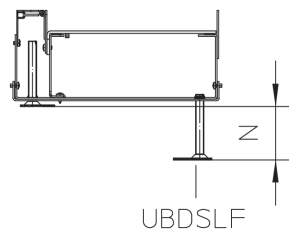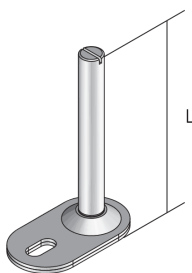

PRODUCT INFORMATION

DIN

, DIN EN 50085

